



# CP Control DSP

Control Software for Signature Series Monitor Systems

## CP Control

The DSP section of the Pelonis Signature series is an integral part of the system, allowing you to fine tune each speaker for just about any environment. Featuring a 5-band EQ, delay, fine level adjustment and mute controls, tweaking your monitoring system has never been easier.

### Equalizer

Five-bands of parametric EQ are provided ranging from 20Hz-20K, with an option to select low and high shelving as well as choosing the desired bandwidth.

Gain is adjustable from -18dB to + 3dB in .5dB increments

### Delay

The delay feature allows you to overcome time-based environmental obstacles that you may encounter, and can be especially helpful in for surround sound applications. Each channel is adjustable in .1ms increments, from 0-10 ms.



### Level

Each channel's output volume can be adjusted in .5dB increments from -60dB to +6dB. A link button allows the channels to operate together.

Clicking the Save Current Settings button will store the current settings in the power unit, so the USB cable no longer needs to remain connected for custom settings to be maintained.

### Installation

Simply download CP Control from the DOWNLOADS section of the Pelonis web site ([www.chrispelonisspeakers.com](http://www.chrispelonisspeakers.com)). For Mac computers operating at 64 bit, you must reboot your computer in 32 bit mode. To do this, simply restart your computer while holding down the 3 and 2 keys.

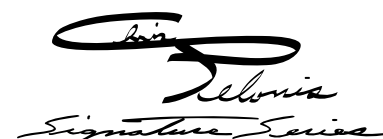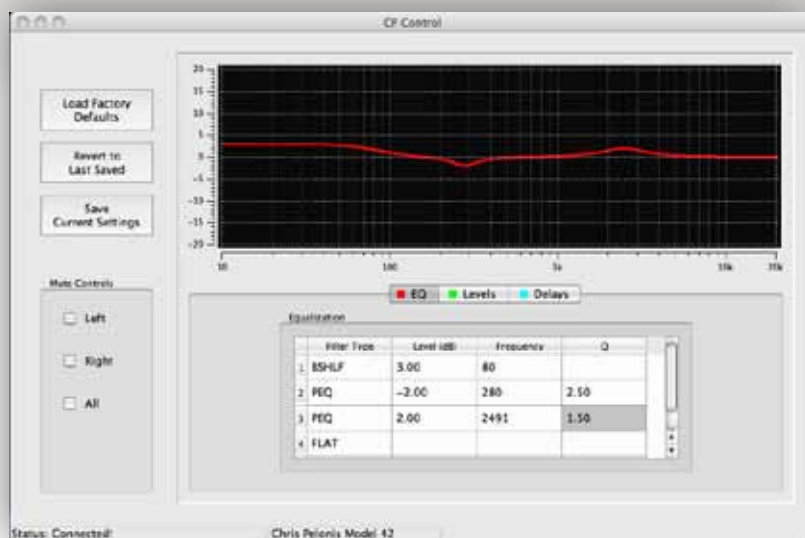

**Pelonis Sound and Acoustics, Inc.**  
Santa Barbara, CA.  
Phone: 805 242 1041  
email: [info@pelonissound.com](mailto:info@pelonissound.com)